DS3604

IoT E-ink Display featuring LoRaWAN®



◆ Going Paperless for More Efficient and Sustainable Operations

DS3604 is a reflective electrophoretic display offering readability and flexibility. The 4.2-inch active area contains 400 x 300 pixels and has 1-bit Black/White/Red full display capabilities. DS3604 supports displaying up to 150 languages and other modules like picture or QR code. Long-capacity batteries and ultra-low power consumption bring a long battery life of up to 5 years. DS3604 enables quickly modifying the displayed content remotely and locally through simple operations and allows remote management in bulk. Moreover, DS3604 can be installed in multiple methods and be compliant with standard LoRaWAN® gateways and networks for more integrated applications.

◆ Features

- 4.2-inch three-color e-ink screen
- 400 × 300 pixels display with high contrast and ultra-wide viewing angle
- Enables quickly modifying the displayed content including text, picture and QR code remotely and
- locally
- Support multiple characters to display up to 150 languages
- Support multicast feature for remote configurations in bulk
- Provide API for management platform integration or development
- Support display template customisation
- Ultra-low power consumption with up to 5-year battery life
- Adapting to multiple scenarios with flexible installation methods
- Equipped with NFC for easy configuration
- Compliant with standard LoRaWAN® gateways and network servers

◆ Specifications

Wireless Transmission	
Technology	LoRaWAN®
Frequency Band	CN470/IN865/EU868/RU864/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16 dBm (868 MHz)/22 dBm (915 MHz)/19 dBm (470 MHz)
Sensitivity	-137dBm
Mode	OTAA/ABP Class A/Class B (Default OTAA Class B)
Display	
E-ink Screen	4.2-inch Black & White & Red E-Ink Screen
Resolution	400 x 300 Pixels
DPI	119
Viewing Angle	180°
Refresh Rate	16s (10 - 40°C)[1]
Display Character	Latin alphabet, English alphabet, Cyrillic alphabet, Greek alphabet, Chinese character, Japanese character, and Hangul
Display Languages[2]	Support Displaying up to 150 Languages Including English, Chinese (Simplified & Traditional) , Spanish, French, Japanese, Portuguese, etc. (Exclude Hebrew, Arabic & Thai)
Operation	
Button	1 x Reset Button (Internal) + 1 x Screen Button
Buzzer	1 x Buzzer
Configuration	NFC Configuration via Mobile App
Physical Characteristics	
Power Supply	3 × 590mAh CR2450 Lithium Batteries
Battery Life[3]	Around 5 Years (Class A Mode + 1 Screen Refresh per Day) Around 1 Year (Class B Mode + 12 Screen Refreshes per Day)


[1] The battery life will be shorten if the device works within 0~10°C for a long time.

[2] Contact us to check the languages supported.

[3] Tested under laboratory conditions and for guideline purposes only.

Operating Temperature	0°C to +40°C (0℉ to +104℉)
Operating Humidity	0% to 95% (non-condensing) below 25°C/77℉
Ingress Protection	IP30
Color & Material	White, ABS + PC
Dimension	99 × 87 × 10.5 mm (3.90 × 3.43 × 0.41 in)
Installation	3M Tape Mounting, Wall Screw Mounting

◆ Dimension (mm)

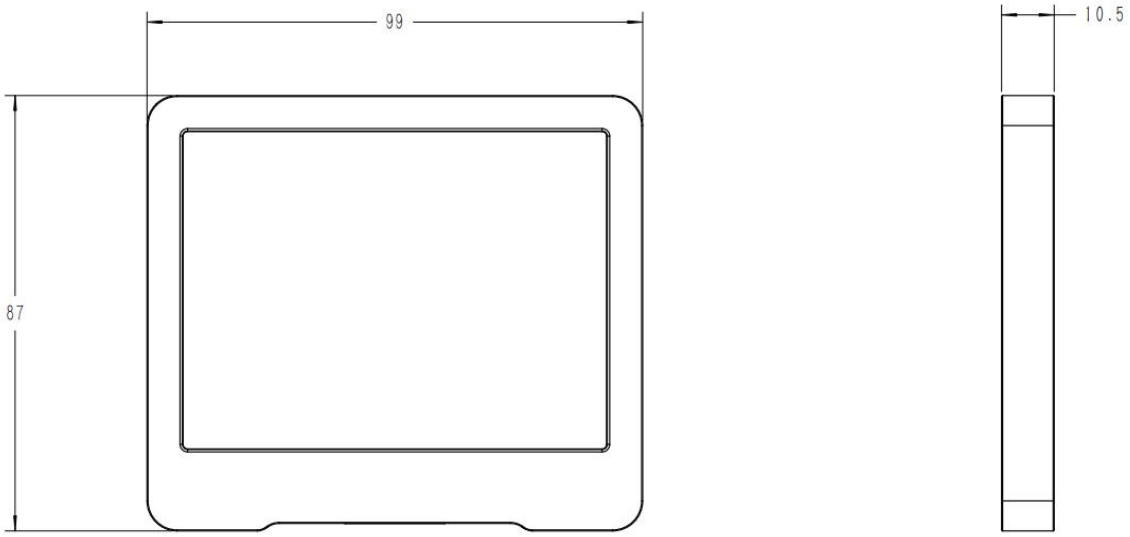

To alert the support team about any issues you are experiencing, please send an email to or create a ticket in our support platform. Please click here: technical@bmetersuk.com

The support team will get back to you as soon as possible.